



# IPv6 and Wireless Communication

---

陳孟彰  
中央研究院資訊科學研究所  
(mcc@iis.sinia.edu.tw)

3/30/2001

Meng Chang Chen

1



## Outline

---

- ✍ Wireless Network
- ✍ Internet Protocol version 6 (IPv6)

3/30/2001

Meng Chang Chen

2



## Wireless LAN and Cellular Phone

---

3/30/2001

Meng Chang Chen

3



## WLAN Current Status

---

- ✧ The 802.11 standards focus on the physical layer and data link layer.
  - ✧ 802.11: 2 Mbit/s, 2.4 GHz spread spectrum (or IR)
  - ✧ 802.11b: 11 Mbit/s, 2.4 GHz spread spectrum
  - ✧ 802.11a: 54 Mbit/s, 5 GHz OFDM
  - ✧ 802.11x: security, QoS, etc.
  - ✧ 802.15/SWAP/HomeRF simple 802.11

3/30/2001

Meng Chang Chen

4



## Blue Tooth

---

- ✍ Short range, low power, inexpensive wireless link
  - ✍ License exempted 2.4 GHz frequency hopping
  - ✍ Bandwidth 64 ... 721 kbit/s, range some meters
- ✍ Distributed mobile terminal
  - ✍ Replace Infrared between mobile terminal, PDA, hands free device, lap top, I/O device, screen, etc.

3/30/2001

Meng Chang Chen

5



## Blue Tooth (cont.)

---

- ✍ Connecting (Ad-Hoc) devices in a room
  - ✍ Jukebox, vending machine, home automation, locking, printer, health monitoring, & PDA/phone (UI+payment)
- ✍ Access solution (poor man's WLAN)
  - ✍ UMTS/BlueTooth dual mode terminal
- ✍ Other Wireless Personal Area Networks
  - ✍ 802.15/SWAP/HomeRF (simple 802.11)
- ✍ Refer to <http://www.bluetooth.com>

3/30/2001

Meng Chang Chen

6

# Mobile Telecommunication System

## First generation

- Regional analog systems for speech service

## Second generation (today)

- Digital circuit switched speech, slow data, and short message services
- GSM (almost global), IS-95 CDMA, IS-136 TDMA. Very large business, soon 1 billion paying customers
- WAP: independent third party service provision

3/30/2001

Meng Chang Chen

7

# Mobile Telecommunication System (cont.)

## 2G+, 2.5G (GPRS/PDC-P)

- packet switch data

## Third generation (3G)

- Drivers: new terminals, capacity, internet boom, WAP,...
- New services: m-commerce, location services, e-mail,...

## Fourth generation:

- Telecom evolution

3/30/2001

Wireless Local Area Networks

Meng Chang Chen

8

# UMTS

## New services and business model


- WAP, SIM toolkit, m-commerce security, ...
- GPRS: up to 43 kbit/s**
  - IP packet switched
- EDGE - enhanced data rates for GSM/global evolution**
  - triple capacity, an option for non-3G operators
  - frequency auctions have made EDGE more attractive
- 3GPP Release 99: WCDMA and 3G GPRS**
  - ca. 100 kbit/s, theoretically over 1 Mbit/s
- 3GPP Release 04: All-IP core-network**

3/30/2001

Meng Chang Chen

9

# 3G Standards and Organizations (from C. Tsao)

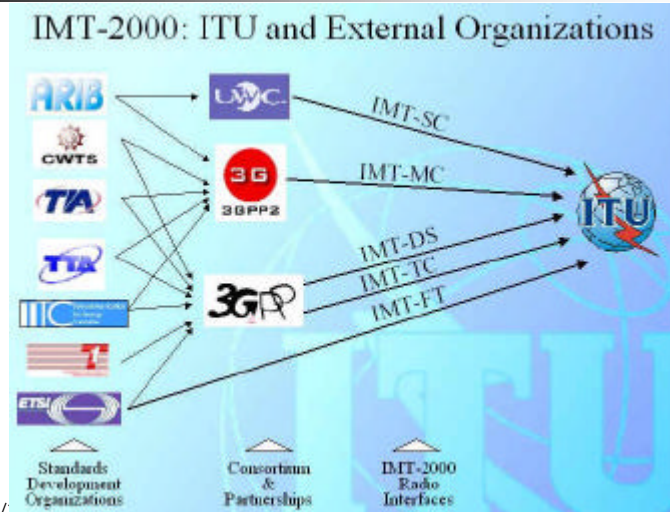


3/30/

10

# 3G Architecture and Technologies (from C. Tsao)

## GPRS Transmission Planes

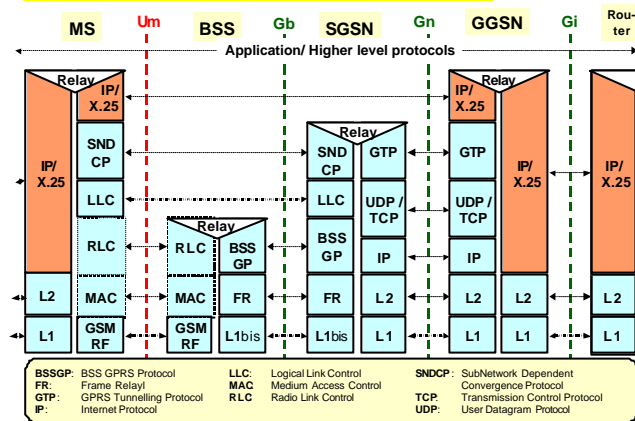

3/30/2001

Meng Chang Chen

11

## What IPv6 can do for Wireless?

- ✍ Address
  - ✍ More devices require larger address space
  - ✍ 4G adopts IP as addressing scheme
- ✍ Auto configuration
- ✍ Security

3/30/2001

Meng Chang Chen

12



## History of Internet Protocol Version 6 (IPv6)

---

- ✍ The Recommendation for the IP Next Generation Protocol, IETF RFC 1752, 1994.
- ✍ Internet Engineering Steering Group approved Proposed Standard, 1994.
- ✍ Core set of IPv6 protocols, IETF Draft Standard, 1998.
- ✍ For RFCs and status, refer to <http://www.ipv6.org>

3/30/2001

Meng Chang Chen

13



## Wireless boosting IPv6

---

- ✍ Proponents of IPv6, a controversial upgrade to the Internet's main communications protocol, say they have finally found their killer application:  
**wireless**.....CAROLYN DUFFY MARSAN,  
NetworkWorldDusion, 10/23/00

3/30/2001

Meng Chang Chen

14



## Difference between Ipv4 and IPv6 Formats

- ✍ Address size!
- ✍ Fixed format for headers
- ✍ No header checksum
- ✍ Different hop-by-hop segmentation procedure
  - ✍ IPv6 uses *path MTU discovery* to decide the max MTU size
- ✍ No TOS field

3/30/2001

Meng Chang Chen

15



## Ipv4 and IPv6—fields revised

- ✍ Different calculation for *payload length*
- ✍ *Protocol type* renamed to *next header*
- ✍ *Time-to-live* renamed to *hop limit*

3/30/2001

Meng Chang Chen

16



## Ipv4 and IPv6—new fields

- ✦ *Flow label*
  - ✦ For real-time traffic
- ✦ *Class*
  - ✦ 8 bits priority


3/30/2001

Meng Chang Chen

17




## IPv4 Header

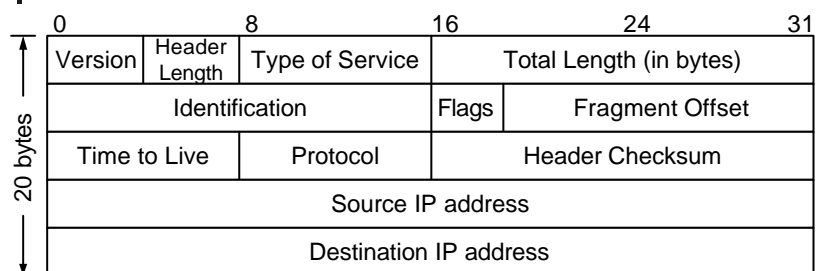

3/30/2001

Meng Chang Chen

18

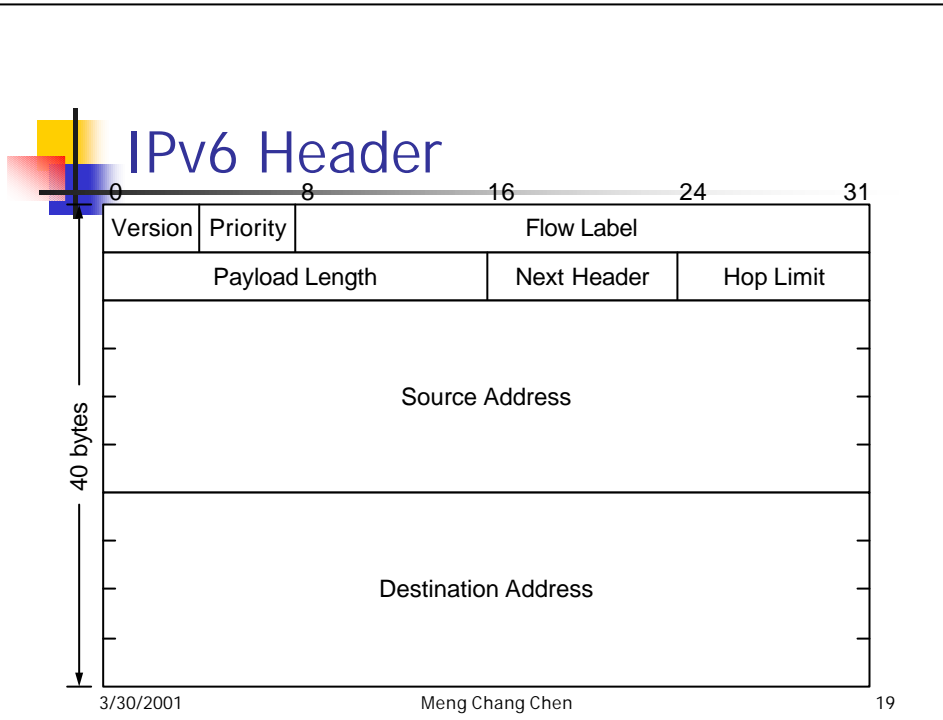


## IPv6 Addressing Architecture

---


RFC 2373  
 R. Hinden, Nokia  
 S. Deering, Cisco  
 July 1998

3/30/2001 Meng Chang Chen 20

## IPv6 Packet with All Extension Headers

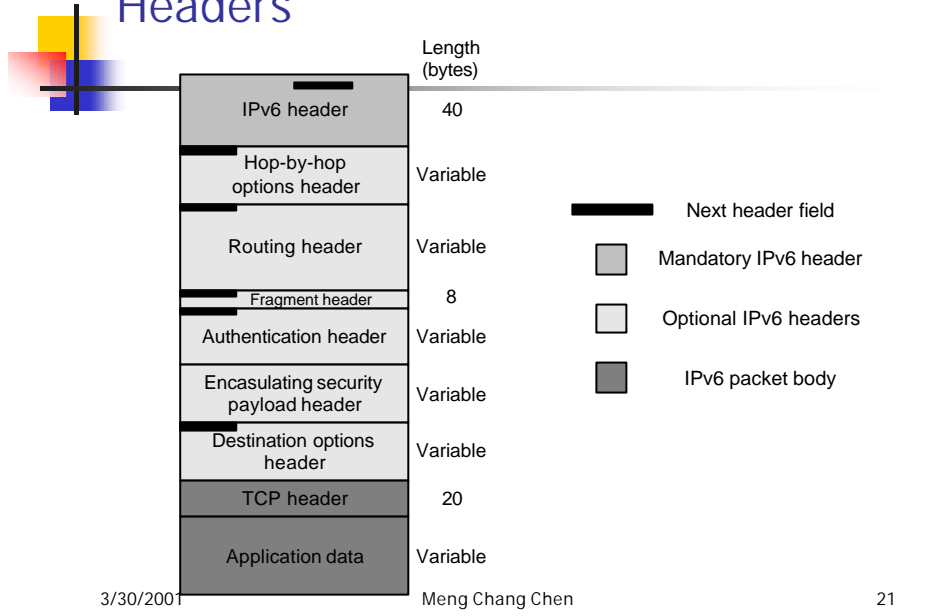


## Hop-by-Hop Options Header & Destination Options Header

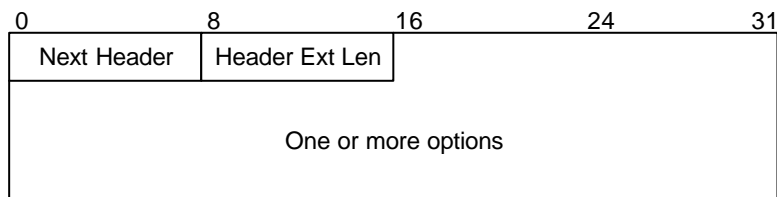



## Fragment Header




3/30/2001

Meng Chang Chen

23



## Generic Routing Header

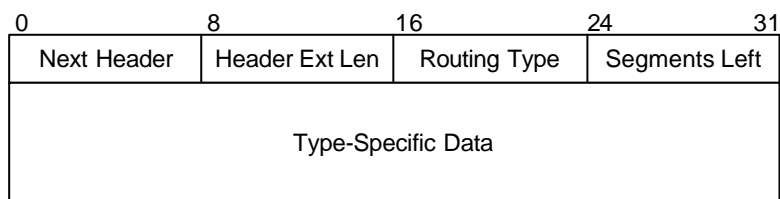


3/30/2001

Meng Chang Chen

24

## Type 0 Routing Header

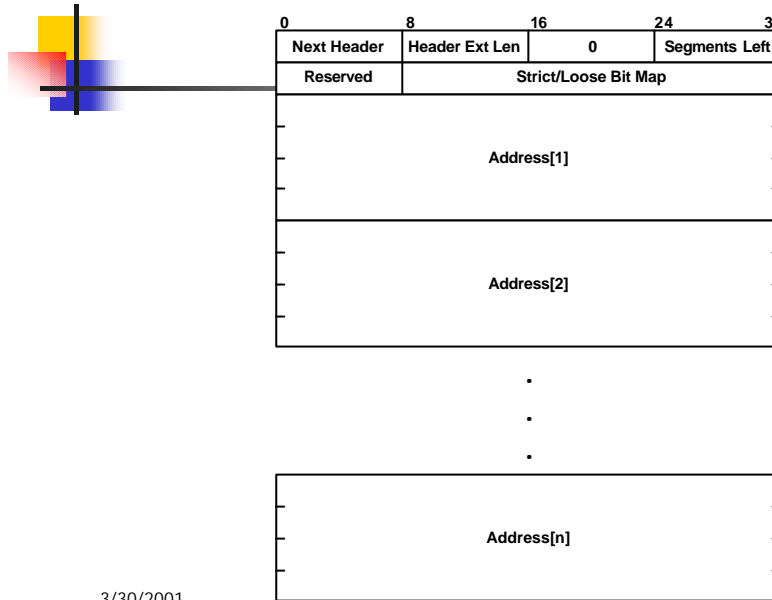

## What IPv6 can do for Wireless?

- ✍ Address
  - ✍ More devices require larger address space
  - ✍ 4G adopts IP as addressing scheme
- ✍ Auto configuration
- ✍ Security



## IPv6 ADDRESSING

- ✍ IPv6 addresses are 128-bit identifiers for interfaces and sets of interfaces.
  - ✍ Unicast
  - ✍ Anycast
  - ✍ Multicast

3/30/2001

Meng Chang Chen

27



## Text Representation of Addresses

- ✍ There are three conventional forms for representing IPv6 addresses as text strings:
  - ✍ FEDC:BA98:7654:3210:FEDC:BA98:7654:3210
  - ✍ 1080:0:0:0:8:800:200C:417A
  - ✍ 1080::8:800:200C:417A
  - ✍ FF01::101
  - ✍ 0:0:0:0:0:0:13.1.68.3
  - ✍ 0:0:0:0:0:FFFF:129.144.52.38

3/30/2001

Meng Chang Chen

28



## Text Representation of Address Prefixes

- ⚡ An IPv6 address prefix is represented by the notation:
  - ⚡ ipv6-address/prefix-length
  
- ⚡ For example, the following are legal representations of the 60-bit prefix 12AB00000000CD3 (hexadecimal):
  - ⚡ 12AB:0000:0000:CD30:0000:0000:0000:0000/60
  - ⚡ 12AB::CD30:0:0:0:0/60
  - ⚡ 12AB:0:0:CD30::/60



## Format Prefix (FP)

| Allocation                            | Prefix (binary) | Fraction of Address Space |
|---------------------------------------|-----------------|---------------------------|
| Reserved                              | 0000 0000       | 1/256                     |
| Unassigned                            | 0000 0001       | 1/256                     |
| Reserved for NSAP Allocation          | 0000 001        | 1/128                     |
| Reserved for IPX Allocation           | 0000 010        | 1/128                     |
| Unassigned                            | 0000 011        | 1/128                     |
| Unassigned                            | 0000 1          | 1/32                      |
| Unassigned                            | 0001            | 1/16                      |
| Aggregatable Global Unicast Addresses | 001             | 1/8                       |
| Unassigned                            | 010             | 1/8                       |
| Unassigned                            | 011             | 1/8                       |
| Unassigned                            | 100             | 1/8                       |
| Unassigned                            | 101             | 1/8                       |
| Unassigned                            | 110             | 1/8                       |
| Unassigned                            | 1110            | 1/16                      |
| Unassigned                            | 1111 0          | 1/32                      |
| Unassigned                            | 1111 10         | 1/64                      |
| Unassigned                            | 1111 110        | 1/128                     |
| Unassigned                            | 1111 1110 0     | 1/512                     |
| Link-Local Unicast Addresses          | 1111 1110 10    | 1/1024                    |
| Site-Local Unicast Addresses          | 1111 1110 11    | 1/1024                    |
| Multicast Addresses                   | 1111 1111       | 1/256                     |



## Interface Identifiers

- Interface identifiers in IPv6 unicast addresses are used to identify interfaces on a link. They are required to be unique on that link. They may also be unique over a broader scope. In many cases an interface's identifier will be the same as that interface's link-layer address.
- In a number of the format prefixes Interface IDs are required to be 64 bits long and to be constructed in IEEE EUI-64 format .

3/30/2001


Meng Chang Chen

31



## Unicast Addresses

- IPv6 unicast addresses are aggregatable with contiguous bit-wise masks similar to IPv4 addresses under Class-less Interdomain Routing




- The address 0:0:0:0:0:0:0:0 is called the unspecified address. It must never be assigned to any node. It indicates the absence of an address.
- The unicast address 0:0:0:0:0:0:0:1 is called the loopback address. It may be used by a node to send an IPv6 packet to itself.

3/30/2001

Meng Chang Chen

32




## Unicast Addresses

### IPv6 Addresses with Embedded IPv4 Addresses

- IPv6 nodes that utilize this technique are assigned special IPv6 unicast addresses that carry an IPv4 address in the low-order 32-bits. This type of address is termed an "IPv4-



- A second type of address is used to represent the addresses of IPv4-only nodes (those that \*do not\* support IPv6) as IPv6 addresses. This type of address is termed an "IPv4-mapped IPv6 address" and has the format:



3/30/2001

Meng Chang Chen

33




## Unicast Addresses

- Link-Local addresses have the following format:



- Site-Local addresses have the following format:



3/30/2001


Meng Chang Chen

34



# Unicast Addresses

The IPv6 aggregatable global unicast address format is as follows:




Where

- 001            Format Prefix (3 bit) for Aggregatable Global Unicast Addresses
- TLA ID        Top-Level Aggregation Identifier
- RES           Reserved for future use
- NLA ID        Next-Level Aggregation Identifier
- SLA ID        Site-Level Aggregation Identifier
- INTERFACE ID Interface Identifier



# Anycast Addresses

- ⚡ Anycast addresses are allocated from the unicast address space, using any of the defined unicast address formats.
- ⚡ When a unicast address is assigned to more than one interface, thus turning it into an anycast address, the nodes to which the address is assigned must be explicitly configured to know that it is an anycast address.





## Multicast Addresses

- An IPv6 multicast address is an identifier for a group of nodes. A node may belong to any number of multicast groups. Multicast addresses have the following format:

3/30/2001

Meng Chang Chen

37



## Multicast Addresses


- flgs is a set of 4 flags: `|0|0|0|T|`
  - The high-order 3 flags are reserved, and must be initialized to 0.
  - T = 0 indicates a permanently-assigned ("well-known") multicast address, assigned by the global internet numbering authority.
  - T = 1 indicates a non-permanently-assigned ("transient") multicast address.
- scop is a 4-bit multicast scope value used to limit the scope of the multicast group.



3/30/2001

Meng Chang Chen

38



## Multicast Addresses

### ☞ Scope

- ☞ 1 , node-local scope
- ☞ 2 , link-local scope
- ☞ 5 , site-local scope
- ☞ 8 , organization scope
- ☞ E , global scope

### ☞ Solicited Multicast Prefix

- ☞ FF01:0:0:0:0:1:FF00::/104

- ☞ Append low-order 24bits from interface ID

- ☞ Example: solicited node multicast address for node 4037::01:800:200E:8C6C is FF02::1:FF0E:8C6C

Index

3/30/2001

Meng Chang Chen

39

## Neighbor Discovery for IP Version 6



RFC 2461

T. Narten, IBM

E. Nordmark, Sun Microsystems

W. Simpson, Daydreamer

December 1998

3/30/2001

Meng Chang Chen

40



## Host Caches

---

- ✦ Host maintains for each interface
  - ✦ Neighbor Cache
    - ✦ IPv6 and media addresses
  - ✦ Destination Cache
    - ✦ IPv6 and neighbor addresses
  - ✦ Prefix List
    - ✦ Prefixes of networks learned from router advertisements
  - ✦ Router List
    - ✦ Link local addresses of interface of routers from RA.

3/30/2001

Meng Chang Chen

41



## States of Neighbor Cache

---

- ✦ INCOMPLETE
  - ✦ Address Resolution is in progress
- ✦ REACHABLE
  - ✦ Recently sent and still in Reachable time
- ✦ STALE
  - ✦ Recently sent but expire Reachable time
- ✦ DELAY
  - ✦ Recently fail , return fail to upper layer
- ✦ PROBE
  - ✦ Recently fail and verifying its reachability

3/30/2001

Meng Chang Chen

42



## Basic Packet Transmission Algorithm

---

- ✍ If the packet destination is in Destination Cache, transmit it to associated neighbor.
- ✍ Check Prefix list to see if cached prefix matches packet destination.
  - ✍ If yes, the destination is local.
  - ✍ If no, select a router to transmit the packet.

3/30/2001

Meng Chang Chen

43



## Basic Packet Transmission Algorithm (cont.)

---

- ✍ When next hop is selected, add to Destination Cache. Check Neighbor Cache.
  - ✍ If not exist, the host sends a *Neighbor Solicitation* message. The neighbor is added to Neighbor Cache with status *Incomplete*.
  - ✍ If exist and incomplete, wait for completion.
  - ✍ If exist and complete, transmit it using media address.
  - ✍ If the cache is not fresh, transmit the packet and send *Neighbor Solicitation*.

3/30/2001

Meng Chang Chen

44



## Neighbor Discovery

- ✦ Determine the link-layer addresses for neighbors reside on attached link
- ✦ Find neighbor routers
- ✦ Keep track of dynamic neighbor status (such as, reachable or not)
- ✦ Collect information for autoconfiguration

3/30/2001

Meng Chang Chen

45



## Neighbor Discovery protocol

- ✦ Based on ICMPv6 protocol with IP next header value of 58. (RFC 2463)
- ✦ Message types
  - ✦ Router Solicitation(RS)
  - ✦ Router Advertisement(RA)
  - ✦ Neighbor Solicitation(NS)
  - ✦ Neighbor Advertisement(NA)
  - ✦ Redirect

3/30/2001

Meng Chang Chen

46



## Neighbor Solicitation

---

- ✍ Issued by a host.
- ✍ Source link-layer address
  - ✍ Link-layer address for the sender
  - ✍ MUST NOT be included when the source IP address is unspecified

3/30/2001

Meng Chang Chen

47



## Neighbor Advertisement

---

- ✍ Target link-layer address
  - ✍ Link-layer address for the target => the sender of the advertisement
- ✍ ICMP fields description
  - ✍ R , whether sender is a router.
  - ✍ S , response to a NS.
  - ✍ O , override an existing cache entry.

3/30/2001

Meng Chang Chen

48



## Redirect

---

- ⌘ To adjust error in packet forwarding.
- ⌘ Target link-layer address
  - ⌘ Should be include if known
- ⌘ Redirected Header
  - ⌘ Original IP packet (all or partial) < 1280 octets
- ⌘ ICMP field
  - ⌘ Target
    - ⌘ Better “next-hop”
  - ⌘ Destination
    - ⌘ Origin Destination of packet redirected

3/30/2001

Meng Chang Chen

49



## Packet Sending Adjustment

---

- ⌘ Check above information to determine appropriate “next hop” => “next-hop determination”
- ⌘ Result of “next-hop determination” will be stored in Destination Cache
- ⌘ Faults will result in “next-hop determination” being performed again
- ⌘ If no router available, node will assume all destination are on the same link

3/30/2001

Meng Chang Chen

50



## Router Solicitation(RS)

- ✍ Issued by the host
- ✍ Source link-layer address
  - ✍ Link-layer address of the sender if known
  - ✍ MUST NOT be included if source IP unspecified
  - ✍ For unknown source, send multicast RA in response

3/30/2001

Meng Chang Chen

51



## Router Advertisement(RA)

- ✍ Replied by a router
- ✍ Possible Options (information for configuration)
  - ✍ Source link-layer address
  - ✍ MTU
  - ✍ Prefix information
    - ✍ All available prefixes except link-local prefix

3/30/2001

Meng Chang Chen

52



## ICMP fields description

- ⌘ Cur Hop Limit
  - ⌘ Default value for IP Hop limit field
- ⌘ Router Lifetime
  - ⌘ Indicate the life time of the router
  - ⌘ In seconds , maximum to 18.2 hours
- ⌘ Reachable Time
  - ⌘ In milliseconds
  - ⌘ Time period a node assume a neighbor is reachable after recent confirmation
- ⌘ Retrans Timer
  - ⌘ In milliseconds
  - ⌘ Indicate the time period between NS

3/30/2001

Meng Chang Chen

53



## Router Advertisement Types

- ⌘ Solicited
  - ⌘ In response to RS
- ⌘ Unsolicited
  - ⌘ Periodically sent
- ⌘ Both share a same timer limit the rate of sending RA
- ⌘ A host MUST NOT send RA
- ⌘ Router send consecutive RA when start up from the link

3/30/2001

Meng Chang Chen

54



## Router Advertisement consistency

---

- ✦ Routers inspect valid Router Advertisement sent by other routers
- ✦ If inconsistency found , log to system in order to do reconfiguration for system administrator
- ✦ Minimum set of information to check
  - ✦ M/O flags
  - ✦ Reachable Time
  - ✦ Retrans Time
  - ✦ MTU
  - ✦ Prefix associated information
  - ✦ Cur Hop Limit

3/30/2001

Meng Chang Chen

55



## Fields of Prefix Information

---

- ✦ Prefix length , 8-bit unsigned integer ,number of leading bits valid
- ✦ L, on-link flag,indicate that this prefix can be used for on-link determination
- ✦ A , autonomous flag,indicate that the prefix can be used for autonomous address configuration
- ✦ Valid Lifetime
  - ✦ In seconds
  - ✦ Time that the prefix is valid
  - ✦ 0xffffffff represents infinity
- ✦ Preferred Lifetime
  - ✦ In seconds
  - ✦ Time that the prefix is preferred
  - ✦ 0xffffffff represents infinity

3/30/2001

Meng Chang Chen

56



## Router and Prefix Discovery

### Router Discovery

- ✦ To locate neighboring routers
- ✦ Learn prefixes and configuration parameters
- ✦ All messages must be validated before any processing

3/30/2001

Meng Chang Chen

57



## Examples for message validation

- ✦ Check ICMP type and code
- ✦ Check the ICMP checksum
- ✦ Check ICMP length
- ✦ Check IP Hop Limit field has a value of 255 => the packet could not possibly have been forwarded by a router

3/30/2001

Meng Chang Chen

58



## Processing Router Solicitations

- ✍ A host MUST ignore RS
- ✍ RA could be sent to unicast or multicast destination (response or advertise) , either way router shall reset its timer for sending RA

3/30/2001

Meng Chang Chen

59



## Processing Router Advertisements

- ✍ Update local variables with received information for existed router
- ✍ Unspecified not equal to default
  - ✍ Prevent nodes from changing variable values
- ✍ Create entry for router appear for the first time
- ✍ Purge router entry which has been timed out or expired

3/30/2001

Meng Chang Chen

60



## Default Router Selection

- ⌘ Invoked during “next-hop determination” being performed or when communication fails
- ⌘ Judging whether routers are reachable or probably reachable in default router list , and select a proper one
- ⌘ If all router in default router list are unreachable, send packet to every router using round robin
- ⌘ If no router response, node assume all destinations are on-link

3/30/2001

Meng Chang Chen

61



## Other Situations for Router Solicitations

- ⌘ An interface becomes enabled
- ⌘ Reinitialized
- ⌘ A router become a host ,by have its IP forwarding capability turned off

3/30/2001

Meng Chang Chen

62



## Address Resolution and Neighbor Unreachability Detection

- ✦ Address resolution
  - ✦ Usually multicast NS with unicast NA
  - ✦ Receiver usually has no idea who sender is
- ✦ NUD (Neighbor unreachability detection)
  - ✦ Usually unicast NS with unicast NA
  - ✦ Receiver usually has the knowledge for sender
- ✦ DAD (duplicate address detection)
  - ✦ Usually multicast NS with multicast NA
  - ✦ Sender has no valid unicast IP

3/30/2001

Meng Chang Chen

63



## Unsolicited Neighbor Advertisements

- ✦ A node's link-layer address changed
- ✦ Set S=0, for not confusing Neighbor
- ✦ Set Override
  - ✦ 0, Neighbor update state=STALE and probe on itself
  - ✦ 1, update Neighbor Cache with received NA

3/30/2001

Meng Chang Chen

64



# IPv6 Stateless Address Autoconfiguration

---

RFC 2462  
S. Thompson, Bellcore  
T. Narten, IBM  
December 1998

3/30/2001

Meng Chang Chen

65



## AutoConfiguration

---

- ✍ Stateful (not included in RFC2462)
- ✍ Stateless
  - ✍ Address assignment
  - ✍ Information collection

3/30/2001

Meng Chang Chen

66



## Stateless AutoConfiguration Design Goals

---

- ✦ Manual configuration is not required
- ✦ A stateful server on the link is not required
- ✦ Configuration should facilitate the graceful renumbering
- ✦ System administrators need the ability to specify whether stateless, stateful or both be used

3/30/2001

Meng Chang Chen

67



## Stateless configuration for hosts

---

- ✦ Use neighbor discovery as base mechanism to achieve stateless autoconfiguration
- ✦ Creation of link local addresses
  - ✦ Whenever an interface becomes enabled
  - ✦ As described in RFC 2373
    - ✦ Prepending the link-local prefix FE80::0 to the interface identifier
    - ✦ Interface identifier is formed based on EUI64 format with minor change

3/30/2001

Meng Chang Chen

68



## Creation of Global and Site-local Addresses

- ⌘ Prepending subnet prefix and interface identifier
- ⌘ On receiving RA
  - ⌘ Update link parameters
  - ⌘ Update prefix information
    - ⌘ Create new addresses
    - ⌘ Expunge expire or invalid addresses
- ⌘ Without router
  - ⌘ Host determine that there is no router
  - ⌘ Form link-local Address

3/30/2001

Meng Chang Chen

69



## Steps to get a unique address

- ⌘ Form a link-local address (not assigned)
- ⌘ Perform DAD
  - ⌘ If DAD fails , log it and disable the interface. But user can still manually config it
- ⌘ If DAD passed ,assign the link-local address to the interface
- ⌘ **Search for router**
  - ⌘ Receiving RA and config itself with information in RA

3/30/2001

Meng Chang Chen

70



## DAD

---

- ✦ Duplicate Address Detection
  - ✦ Use to examine whether a link-local address is unique
  - ✦ Implement with
    - ✦ Neighbor Solicitation
    - ✦ Neighbor Advertisement

3/30/2001

Meng Chang Chen

71



## Steps to perform DAD

---

- ✦ Sender : send NS Messages
- ✦ Receiver : receive NS
- ✦ Receiver : send NA if necessary
- ✦ Sender : receive NA (DAD fails)
  - ✦ If the address is a link-local address , disable the interface
  - ✦ Log the error

3/30/2001

Meng Chang Chen

72



## SITE RENUMBERING

- ☞ Time-out addresses assigned to interfaces in hosts
  - ☞ At present , upper layer protocols such as TCP provide no support for changing end-point addresses while a connection is open
  - ☞ even in UDP , addresses must generally remain the same during packet exchange

3/30/2001

Meng Chang Chen

73



## SITE RENUMBERING(cont.)

- ☞ Valid address
  - ☞ Preferred : When a new connection established ,use preferred address if possible
  - ☞ Deprecated : unless no preferred address available , don't use deprecated address in new connection

3/30/2001

Meng Chang Chen

74



## SITE RENUMBERING(cont.)

- ✍ IP layer is expected to provide a means for upper layer to select most appropriate source address
- ✍ If upper layer does not specify source address , IP layer should choose a suitable one on the application's behalf

3/30/2001

Meng Chang Chen

75



## Considerations

- ✍ Stateless autoconfiguration imply unauthenticated node attached to network and work properly
- ✍ DAD opens up the possibility of DOS attack
  - ✍ Reply every DAD probing so no nodes can get a proper address

3/30/2001

Meng Chang Chen

76



## IEEE EUI-64

- ✍ The IEEE defined 64-bit extended unique identifier (EUI-64) is a concatenation of the 24-bit company\_id value by the IEEE Registration Authority (IRA) and a 40-bit extension identifier assigned by the organization with that company\_id assignment

3/30/2001

Meng Chang Chen

77



## Identifier applications

- ✍ MAC-48. A 48-bit identifier used to address hardware interfaces within 802 based networking applications.
- ✍ EUI-48. A 48-bit identifier used to identify a design instance, as opposed to an hardware instance. Examples include software interface standards (such as VGA) or the model number for a product.
- ✍ EUI-64. A 64-bit identifier used to identify each hardware instance of a product, regardless of application, such as wireless devices and computerized toasters.

3/30/2001

Meng Chang Chen

78



## Restricted encapsulated values

- ✎ To support encapsulation of EUI-48 and MAC-48 values within small subsets of the EUI-64 values, the first four digits of the manufacturer's extension identifier shall not be  $FFFF_{16}$  or  $FFFE_{16}$ .
- ✎ Thus, the 64-bit values of the following form are never-assigned EUI-64 values:
  - $ccccccFFFEeeeeee_{16}$  (an EUI-48 extension)
  - $ccccccFFFFeeeeee_{16}$  (a MAC-48 extension)

3/30/2001

Meng Chang Chen

79



## Dilemma of Dynamic Host Configuration

- ✎ Situation 1: needs IPv6 to query servers and receive responses
- ✎ Situation 2: needs to locate and query DHCP server for IPv6 address
- ✎ Solution:
  - ✎ Link local address
  - ✎ multicast

3/30/2001

Meng Chang Chen

80



## Four steps DHCP Set-up

- ✦ Host: Solicitation
- ✦ DHCP server: Advertise
- ✦ Host: Request
- ✦ DHCP sever: Reply
- ✦ Other operation: release, reconfigure

3/30/2001

Meng Chang Chen

81



## DHCP Server Solicitation Procedure

- ✦ Host sends
  - ✦ DHCP solicitation message to all DHCP servers and relay agents address
    - ✦ Source address: host's link local address
    - ✦ Transport layer protocol: UDP port 546,547
- ✦ Relay agent sends (if receives from host)
  - ✦ DHCP solicit message to all DHCP servers
  - addressServer replies
    - ✦ Advertise message to relay agent or host
      - ✦ Client's link local address
      - ✦ Extensions: configuration parameters for clients

3/30/2001

Meng Chang Chen

82



## DHCP Server Determination

---

- ✍ A host may receive several advertisement messages. Then it will select a DHCP server and maybe an agent.
- ✍ If not, it will repeat its solicitation.
- ✍ A host then sends a request message for requesting configuration parameters.

3/30/2001

Meng Chang Chen

83



## DHCP Server Extension Message

---

- ✍ Address: Client IPv6 address
- ✍ Preferred and Valid lifetimes (of address)
- ✍ Domain name
- ✍ Other server addresses: DNS, directory, etc.

3/30/2001

Meng Chang Chen

84



## What's wireless network related to IPv6?

---

- ✦ Implement neighbor discovery and autoconfiguration in IPv6 for wireless network.
- ✦ Optimize the implementation and operations.
- ✦ Make sure it works for all perspectives.
  - ✦ performance
  - ✦ Correctness
  - ✦ efficiency

3/30/2001

Meng Chang Chen

85



## The End.

---

陳孟彰  
中央研究院資訊科學研究所  
(mcc@iis.sinia.edu.tw)

3/30/2001

Meng Chang Chen

86